


NEK2168GK



ENGINEERING CODE
959FA51

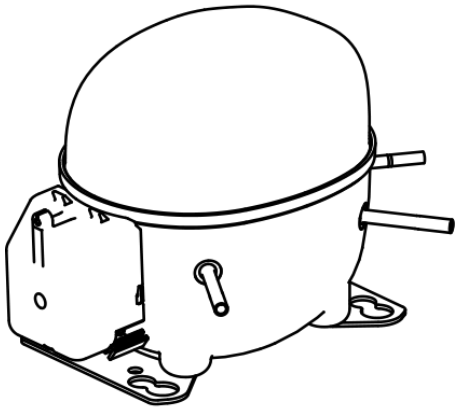

REFRIGERANT
R-404A



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
LBP



MOTOR TYPE
CSCR



STANDARD
EN12900



COOLING CAPACITY
378 W



EFFICIENCY
1.06 W/W

DATA

GENERAL DATA

Model	NEK2168GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	3/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	13.2 Ω at 25°C
Run Winding Resistance	4.0 Ω at 25°C

MECHANICAL DATA

Displacement	14.28 cm³
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	11.6 Kg

ELECTRICAL COMPONENTS

Start Capacitor	88-108 µf/330 V
Run Capacitor	10.0 µf/450 V
CSR CSIR BOX	Yes
Starting Device Description	RVA3N3C-122
Overload Protection	T0834/G9

EXTERNAL CHARACTERISTICS

Base Plate	SMALL
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	LBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
40	-35	378	1.06	358	-	10.25
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.						

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	313	1.02	307	-	7.94
-35	414	1.18	350	-	10.57
-30	541	1.35	401	-	13.87
-25	694	1.52	456	-	17.87
-20	873	1.70	513	-	22.63
-15	1079	1.90	568	-	28.19
-10	1313	2.12	619	-	34.62
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE

Condensing Temperature 45°C


Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	253	0.80	318	-	7.30
-35	341	0.94	363	-	9.87
-30	449	1.07	418	-	13.06
-25	579	1.20	481	-	16.94
-20	731	1.33	548	-	21.55
-15	906	1.47	617	-	26.93
-10	1104	1.61	685	-	33.15
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	350	0.83	420	-	11.95
-25	457	0.94	487	-	15.69
-20	581	1.03	562	-	20.14
-15	723	1.13	642	-	25.35
-10	885	1.22	724	-	31.35
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

ENVELOPE

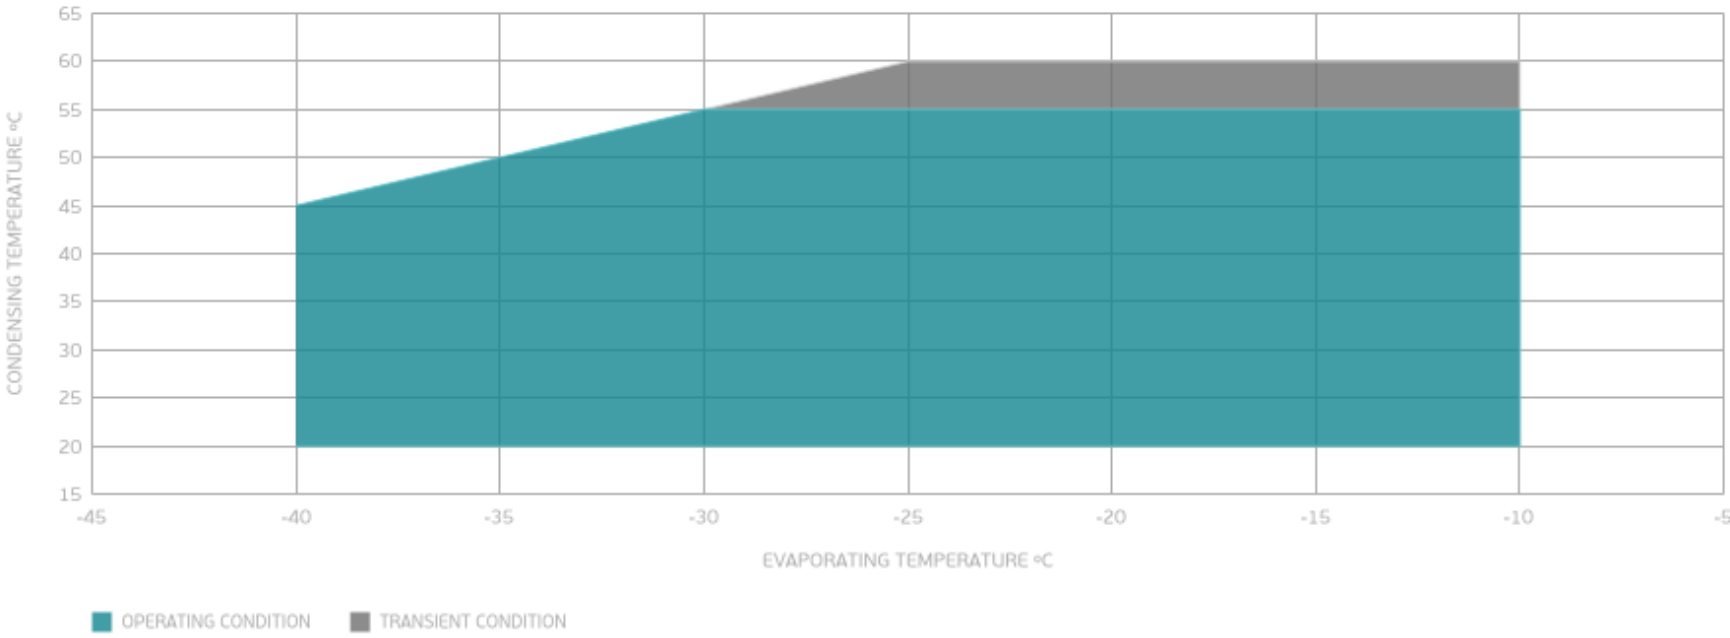

EXTERNAL DIMENSIONS

