


NEK2125GK



ENGINEERING CODE
957EA51

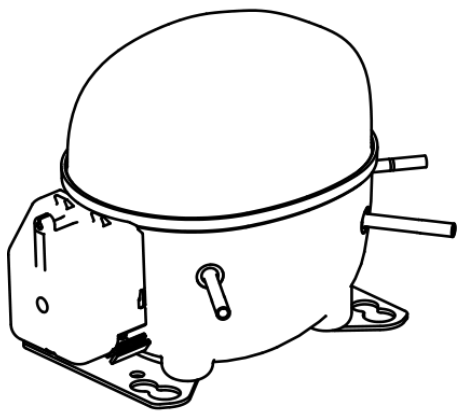

REFRIGERANT
R-404A



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
LBP



MOTOR TYPE
CSIR



STANDARD
EN12900



COOLING CAPACITY
191 W



EFFICIENCY
0.94 W/W

DATA

GENERAL DATA

Model	NEK2125GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1/3+
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	27.7 Ω at 25°C
Run Winding Resistance	6.0 Ω at 25°C

MECHANICAL DATA

Displacement	6.2 cm ³
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	10.4 Kg

ELECTRICAL COMPONENTS

Start Capacitor	53-64 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	9660A-XXX-140*
Overload Protection	T0186/G6

EXTERNAL CHARACTERISTICS

Base Plate	SMALL
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	LBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
40	-35	191	0.94	204	-	5.17
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.						

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	163	0.91	179	-	4.14
-35	208	1.04	200	-	5.31
-30	263	1.18	222	-	6.75
-25	330	1.35	245	-	8.51
-20	411	1.55	266	-	10.66
-15	508	1.78	285	-	13.27
-10	622	2.07	300	-	16.40
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE

Condensing Temperature 45°C


Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	132	0.73	181	-	3.81
-35	172	0.84	205	-	4.98
-30	220	0.95	232	-	6.40
-25	278	1.07	259	-	8.12
-20	347	1.21	287	-	10.22
-15	429	1.37	313	-	12.75
-10	526	1.56	338	-	15.79
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	172	0.74	233	-	5.86
-25	220	0.83	265	-	7.56
-20	277	0.93	298	-	9.61
-15	345	1.04	331	-	12.08
-10	425	1.17	364	-	15.03
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

ENVELOPE

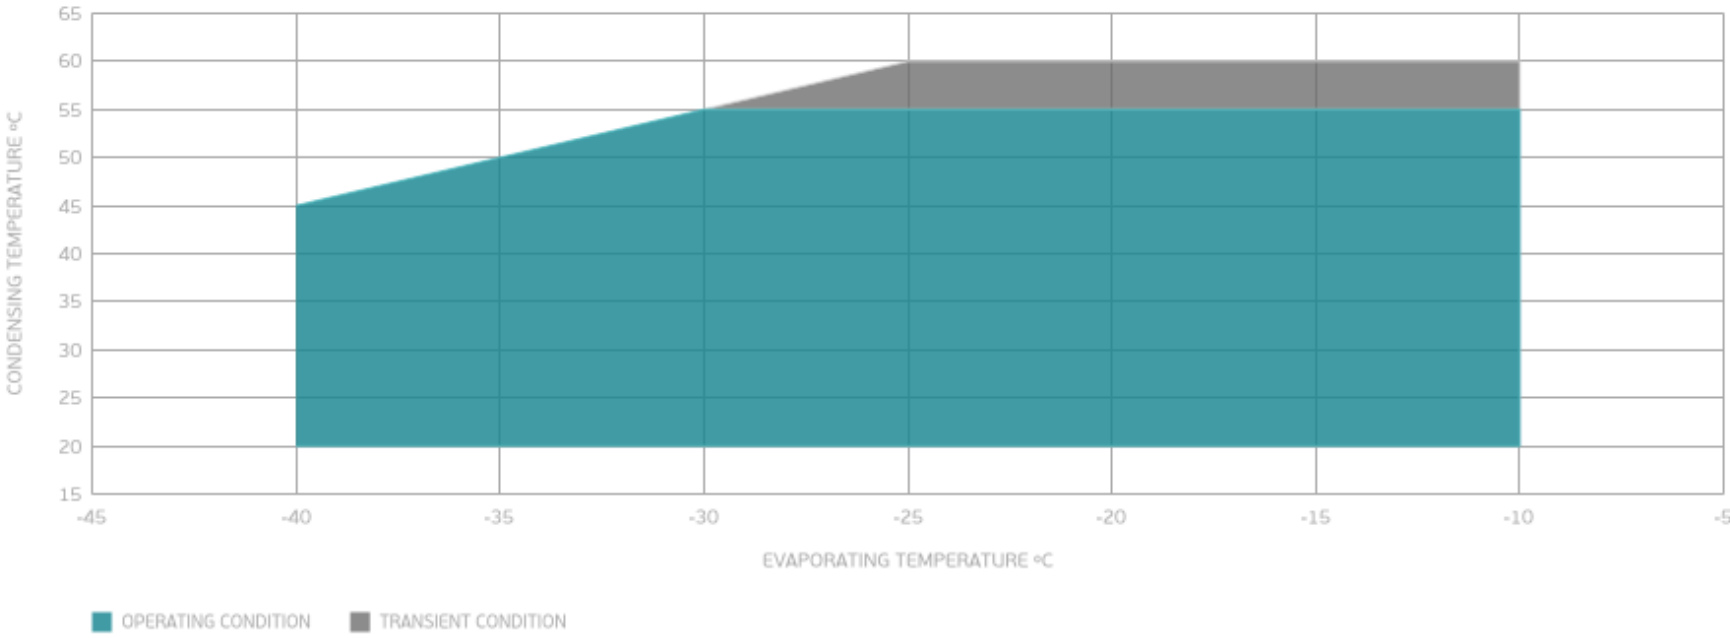

EXTERNAL DIMENSIONS

